

# ComAnt<sup>®</sup> Communications Antennas



## FREQUENCY INDEPENDENT DATA

Description: directional yagi  
 Frequency: 326-353 MHz, 336-364 MHz,  
 365-395 MHz, 380-410 MHz,  
 405-440 MHz, 440-475 MHz,  
 830-890 MHz, 880-960 MHz

Impedance: 50 ohm  
 Gain: 12 dBi  
 H -3 dB: 46°  
 E -3 dB: 39°  
 F/B: 12 dB  
 Polarization: vertical/horizontal  
 Connector: N-female/TNC-female  
 VSWR: < 1.5  
 Radome: UV resistant ABS/FG,  
 RAL 7012, PU foam filling  
 copper

Radiator: coated aluminium  
 Passive elements: Ø35-60 mm, aluminium alloy  
 Attachment: bracket, stainless steel V-bolts and self locking nuts

Lightning protection: DC-short circuited  
 Temperature: -40° - +80°C  
 IP: 67

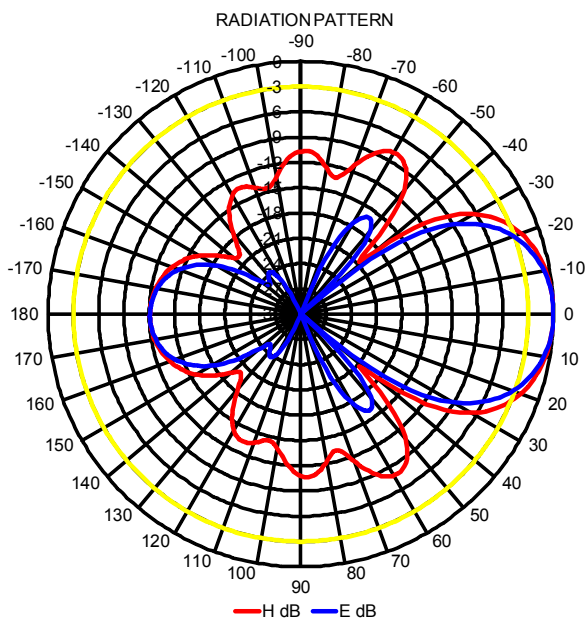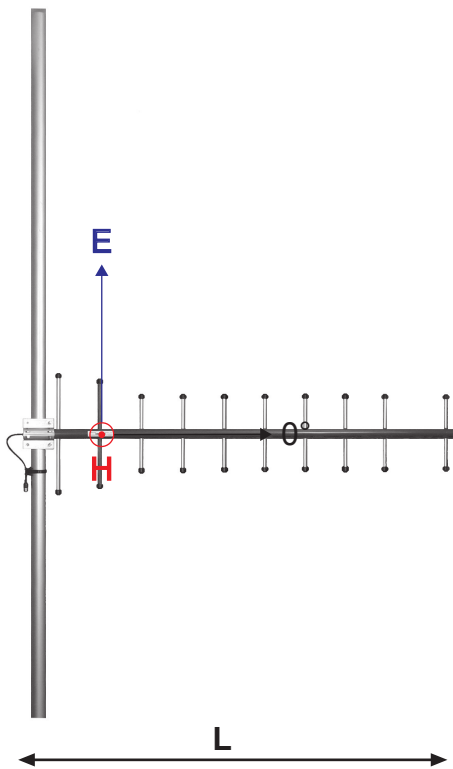

**CAY++++ DIRECTIONAL YAGI**